



DESIGN & SPECIFICATIONS




MATERIAL:	INDUSTRIAL GRADE INJECTION MOLDED NYLON NOT AFFECTED BY
CHEMICAL RESISTANCE:	DIESEL FUEL, MOTOR OIL, COOLANT, SALT, ACETONE, DETERGENT, OR WINDOW CLEANER
FREEZING TEST:	-25°F FOR 30 DAYS
MOUNTING:	STANDARD MOUNTING, TRIMS EASILY
THICKNESS:	.25"
WEIGHT:	1.99lbs

2-YEAR WARRANTY

Eco Flaps offer a hassle free 2-year warranty. Simply send a picture to [ecoflaps@ecoflaps.com](mailto:ecoflaps@ecoflaps.com) and we will send a replacement flap.

65mph road spray test

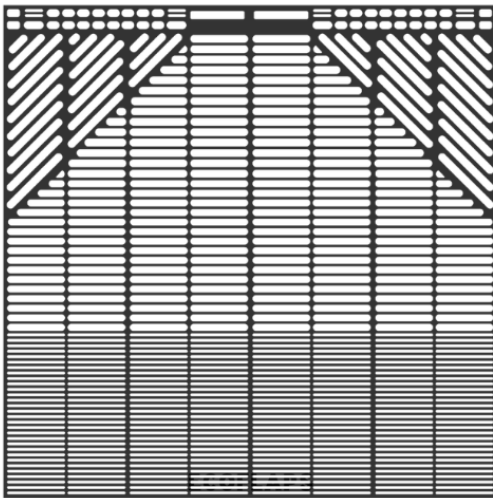

24x24 Eco Flap

ECOFLAPS have patented wing-shaped channels designed to reduce aerodynamic drag and road spray by 70%, making them the most efficient and safe mudflap on the market. With over 30 3<sup>rd</sup> party independent fuel tests, Eco Flaps are proven to save 1-3% of fuel.

Solid Flap



Competitor A



Competitor B



Eco Flaps



Injection molded from an industrial grade nylon, ECOFLAPS are built to withstand extreme conditions. They are unbelievably tough and highly resistant to flap "pinch," which means additional savings because you spend less on repairs or replacement costs.



5210 Maryland Way, Suite 100  
Brentwood, TN 37027



615-398-2300  
[ecoflaps.com](http://ecoflaps.com)